


BRACKETS


INSTALL MOUNTING BRACKETS USING CORRECT SCREWS

INSIDE MOUNT

For inside mount, use holes on top of bracket.
Brackets must be level/flush with each other

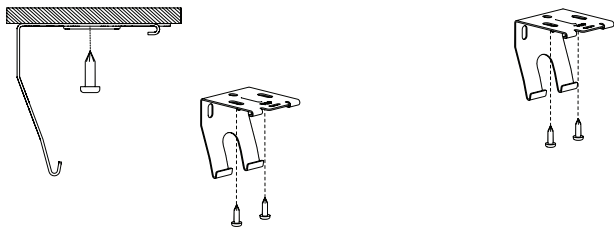



For outside mount, use holes on the back of bracket.
Brackets must be level.

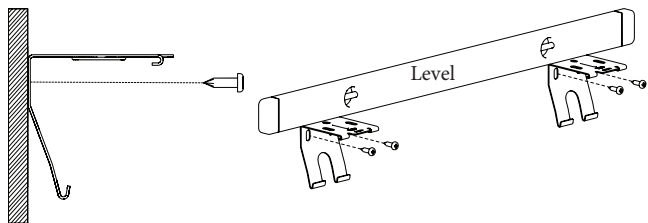

HEAD RAIL

INSTALL HEAD RAIL

Snap Headrail into place by sliding groove in back of headrail into the bottom of the mounting bracket. Push forward and up, snapping the headrail into the top of the mounting bracket.

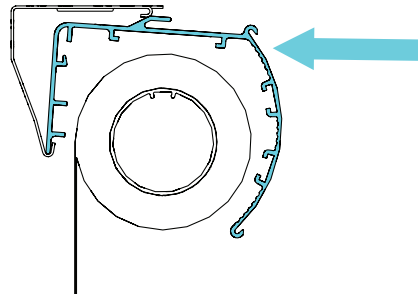

Note: The Cassette 100 image is used **without the endcaps** for illustration purposes.

INSTRUCTIONS TO REMOVE THE SHADE:

1. Push the cassette towards the wall.
2. Pull the cassette downwards.
3. If needed, you can also
 - a. Push the cassette towards the wall.
 - b. Push a flat head screw driver between the bracket and cassette.
 - c. Rotate the screw driver around its axis.
 - d. Pull the cassette away from the brackets.

